

C-200037







DWG NO.




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC
-
DIST
-

PICK & PLACE AREA

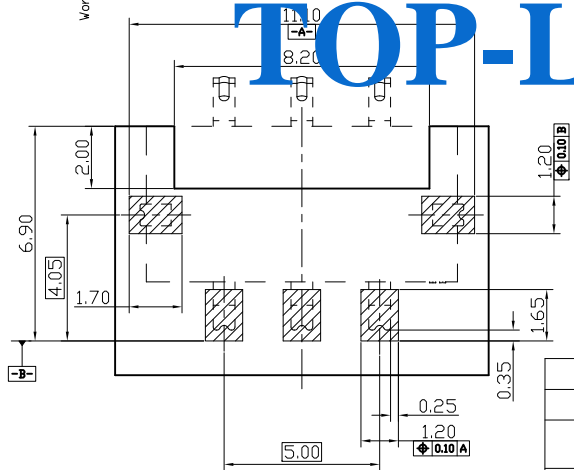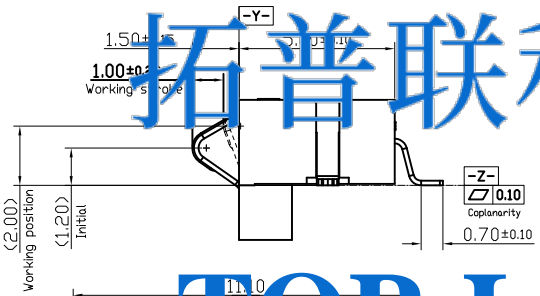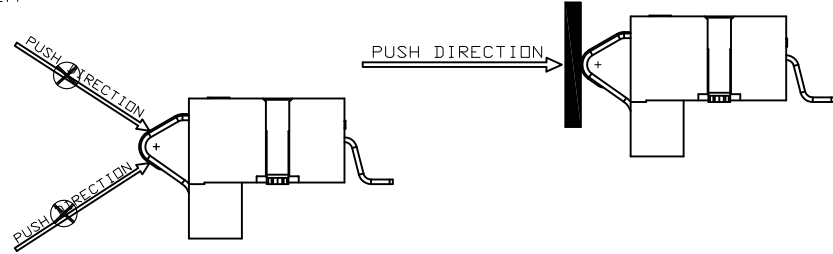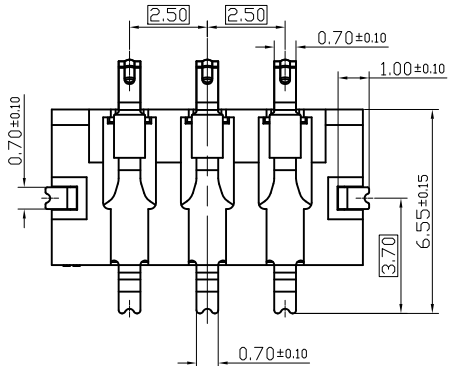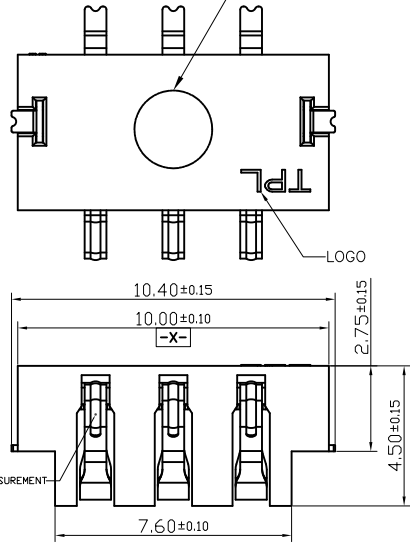

USED ON -



拓普联科

TOP-LINK

- NOTES:
- SPECIFICATION:
 - ELECTRICAL CHARACTERISTICS:
 - VOLTAGE RATING : 200V AC/DC
 - CURRENT RATING:1.0A
 - LOW LEVEL CONTACT RESISTANCE:50 mΩ Max.
 - MECHANICAL CHARACTERISTICS:
 - CONTACT NORMAL FORCE:80gf Min PER PIN AT WORKING STROKE
 - STABILITY : MATED 10,000 CYCLES AT WORKING STROKE WITHOUT DEGRADING
 - ENVIRONMENTAL CHARACTERISTICS:
 - OPERATING TEMPERATURE RANGE : -20°C TO +70°C.
 - TAPE & REEL PACKAGING PER EIA481 STANDARD.
 - DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.
 - HARMFUL MATERIAL CONTROL FOLLOW "RoHS"

		PART NUMBER	200037-3
4	CARRIER TAPE	12mm	TRANSPARENCY,W=16mm,Q'ty/REEL=1000Pcs.
3	PAD	2	SUS,Ni:20u"(0.5um)Min OVER ALL,Sn:50u"(1.25um)Min OVER ALL.
2	CONTACT	3	COPPER ALLOY,Au:1u"(0.025um) Min OVER ALL. Au:10u"(0.25um)Min ON CONTACT AREA.
1	HOUSING	1	HIGH TEMPERATURE THERMAL PLASTIC
ITEM	PART NAME	QTY	DESCRIPTION

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL		HT TR		FIN	
0	= ±	-		-		-	
0.0	= ±0.20	DWN	Kent	APVD	Lansing	Top-Link Electronics Ltd.	
0.00	= ±0.15	CHK	Harvey	REL	Top-Link Electronics		
ANGLE:		NAME					
0	= ±3°	CUSTOMER DRAWING FOR 3PIN 2.5PITCH 4.5H SINK BATTERY CONNECTOR (ON BOARD 2.75H)					
0.0	= ±2°	SCALE	A4	DWG NO.	C-200037	SHEET	REV
REMOVE BURRS. BREAK SHARP EDGES R0.10 MAX DO NOT SCALE PRINT		1:1				1 OF 1	A

LTR	REVISION RECORD	APVD	DATE
-----	-----------------	------	------