USED ON
—

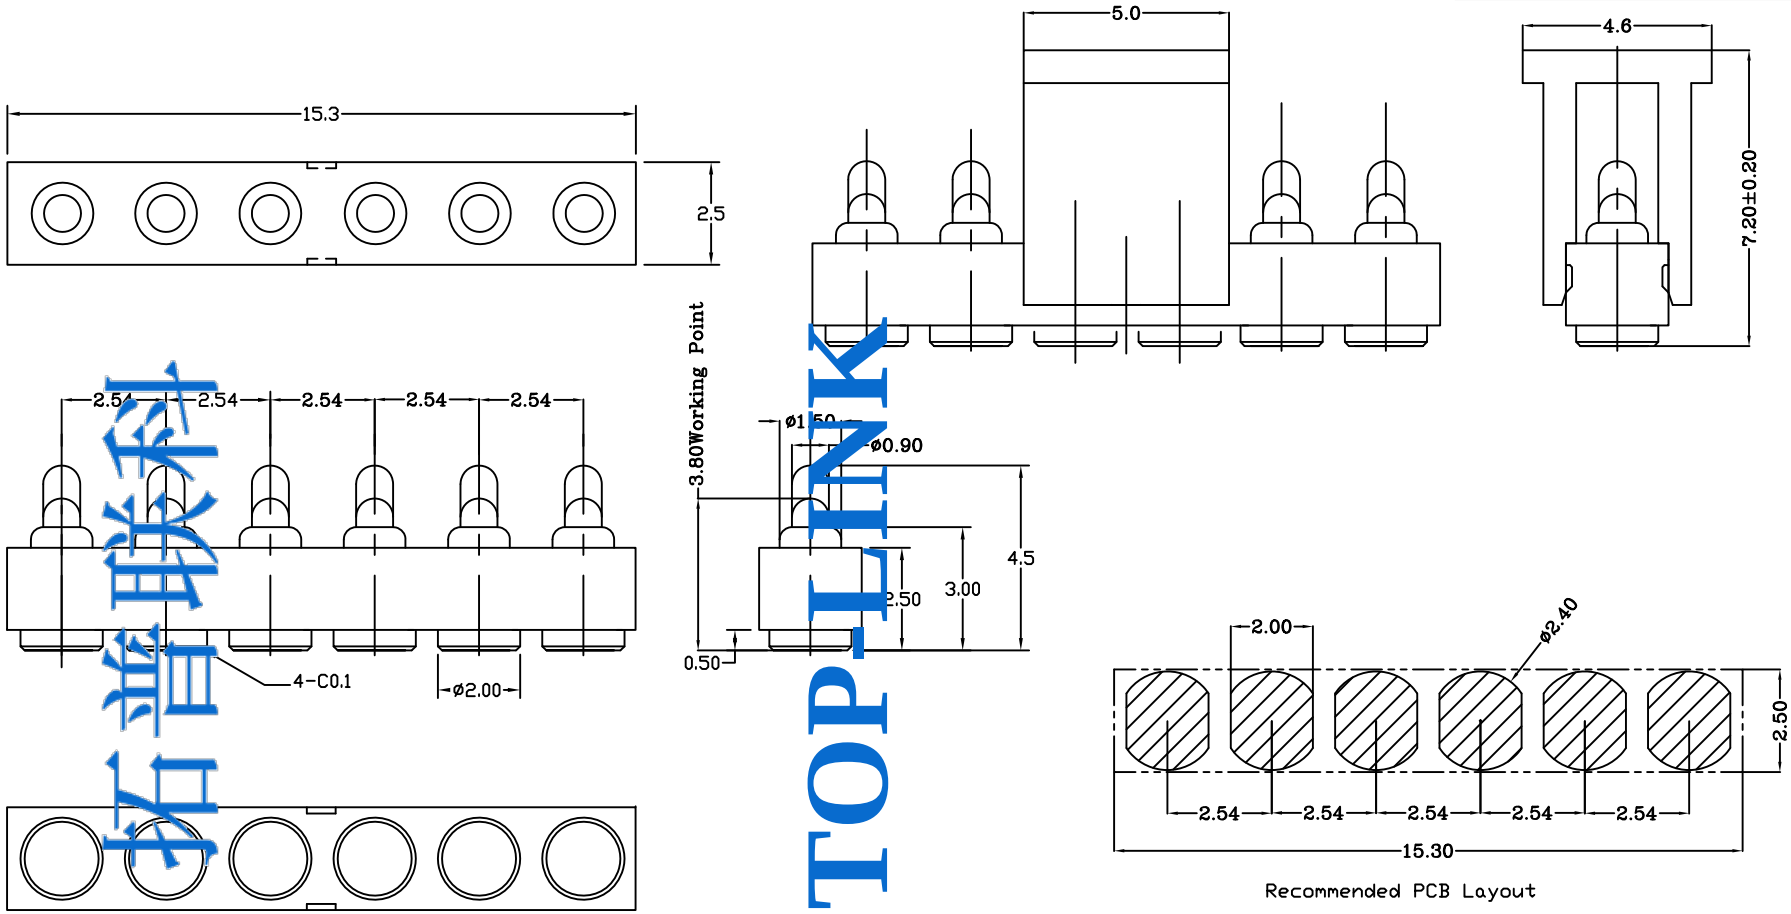

Recommended PCB Layout

Notes:

1 Material, Housing: PA 4.6 (30% Glass Filled)
Color Black.
Contact: Brass

2 Mechanical demands:
Spring force: Min 80g with 0.7mm stroke
Full stroke is 1.0 mm
Plating Plunger: 0.4um Au over 1.4um Ni
Plating Body: 0.1um Au over 1.4um Ni.

LTR	REVISION RECORD	APVD	DATE
	Change Housing		2008/09/02
	NEW		2007/09/26

DIMENSIONS IN MM
TOLERANCES UNLESS OTHER SPECIFIED
0 = ±-
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 3.2
REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL 1	HT TR —	FIN —	
DWN	APVD	Top-Link Electronics Ltd.	
CHK	REL		
NAME	BATTERY POGO CONNECTOR 6 POSITIONS PGC-1.5-4.5-R-6P-2.54PH		
SCALE 1:1	A4	DWG NO. C-100184	SHEET 1 OF 1 / REV B1

100184-6
PART NUMBER

LOC -
DIST -

DWG NO. C-100184

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

拓普联科 TOP-LINK