


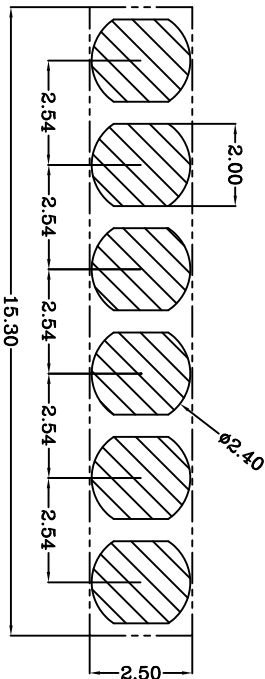
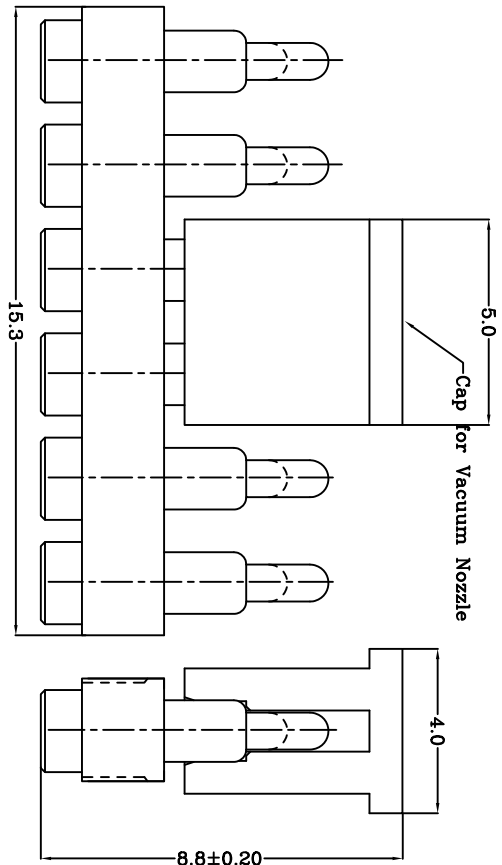
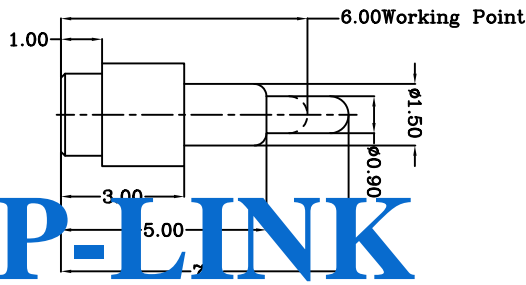


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

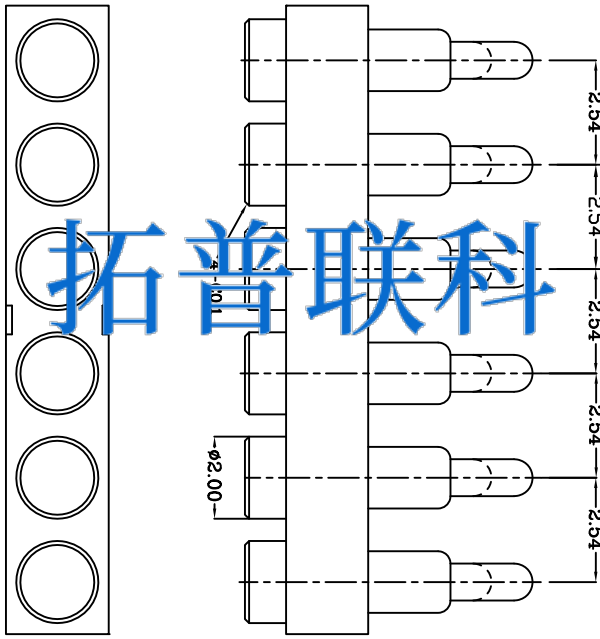

DWG NO.
C-100410

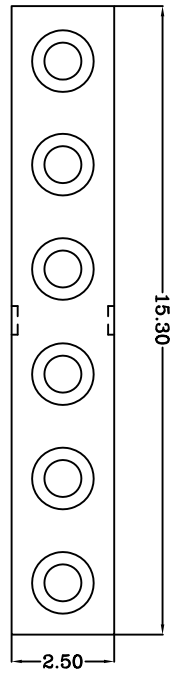

Recommended PCB Layout

Notes:
1 Material, Housing: PA 46 (30% Glass Filled)
Color: Black.
Contact: Brass
2 Mechanical demands:
Spring force: Min. 0.15N with 0.3mm stroke
Plating Plunger: 0.75±0.25N with 1.0mm stroke.
Plating Body: 0.10um Au over 1.4um Ni.

TOP-LINK

LDC	-
DIST	-

LTR	REVISION	APVD	DATE
	RECORD		

DIMENSIONS IN MM	MATL	HT TR	FIN
TOLERANCES UNLESS	DWN		
OTHER SPECIFIED	Qin		
0 = ±	CHK		
0.0 = ±0.15	Jim		
0.00 = ±0.10	NAME		
0.000 = ±	BATTERY POGO CONNECTOR 6 POSITIONS		
ANGLE: ±1°	PGC-1.5-7.0-R-6P-2.54PH		
SURF TEXTURE: 32/	SCALE	DWG	NO.
REMOVE BURRS, BREAK	1:1	A4	C-100410
SHARP EDGES R0.05 MAX			
DD NOT SCALE PRINT			

100410-6	PART NUMBER
100410-6	PART NUMBER
Top-Link Electronics Ltd.	Top-Link Electronics Ltd.

USED ON

4 3 2 1