
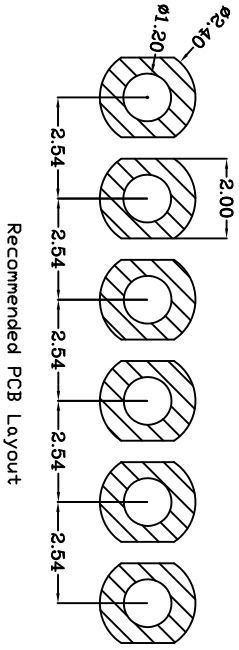
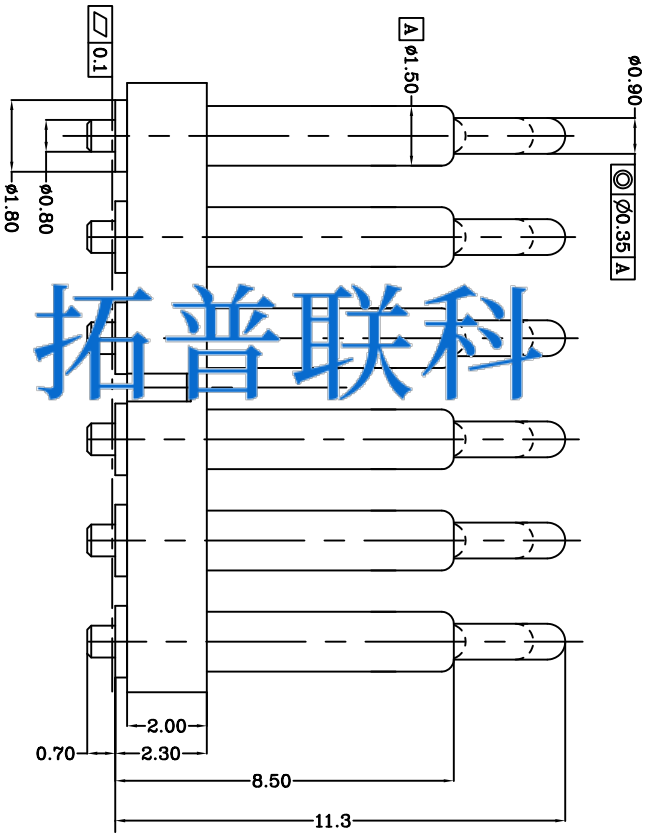


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWN No.:

C-110928

Proposal

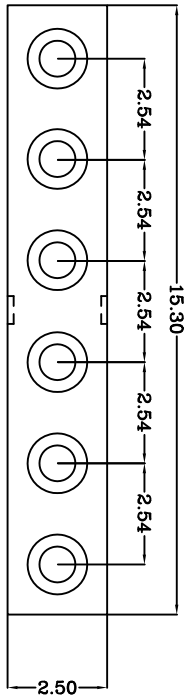

Item	Part name	Qty/Ed	Material	Finish
1	HSG	1	High temp. Plastic UL94 V-0 Color Black	
2	Body	6	Leaded Brass	Gold plating over Nickel plating
3	Plunger	6	Leaded Brass	Gold plating over Nickel plating
4	Spring	6	Stainless steel wire	
5				

Max. working height	10.50mm	85±20gf <31>
Min. working height	8.80mm	215±50 gf
Durability	100000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max. Current rating: 2.0A
- 4 RoHS compliant.

Rev.	Revision record.	Date.
	NEW	2012/12/19

Top-Link Electronics Ltd.		Type	Unit	Weight
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm	
0.0	±0.15	DWN:	APVD:	
0.00	±0.10	Col wanlu	REL:	
0.000	±0.05	Angle: ±4°		
SURF. TEXTURE:		Name	Customer drawing	
REMOVE BURRS.		Scale	Size	DWG No.
BREAK SHARP EDGES		1:1	A4	C-110928
RO.05 MAX. DO NOT SCALE PRINT.				Page 1/1
				Rev. 1

110928-6
PART NUMBER

Top-Link Electronics
Top-Link Electronics Ltd.