proposal

DWN No.: C-100967

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	————
2	Body	6	Leaded Brass	Min Au 0.1um over min Ni 1.4um
3	Plunger	6	Leaded Brass	Min Au 0.4um over min Ni 1.4um
4	Spring	6	Stainless steel wire	————
5				

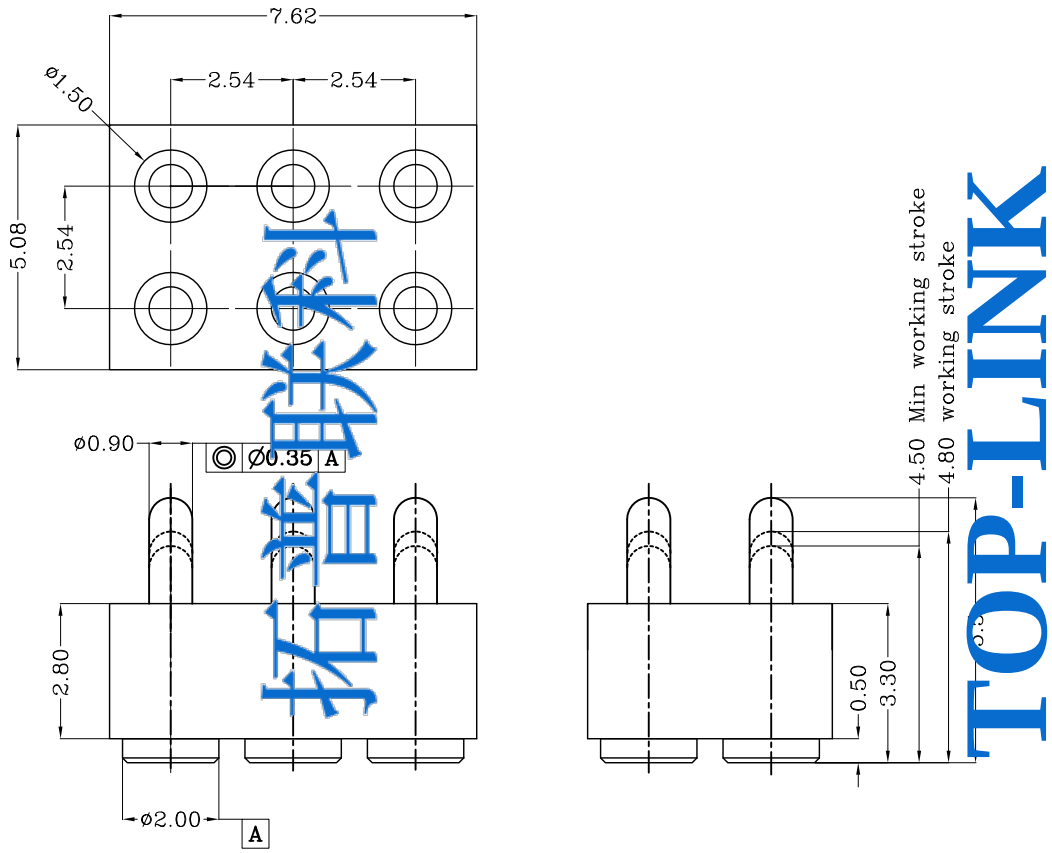

拓普联科
TOP-LINK

Table 1 Mechanical performance		
working height	4.80mm	60gf Max
Durability	10000cycle	

Notes:
1 Dimensions shall be interpreted per ASME Y14.5M.
2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning: Working height are not permitted to be less than Min working height.
3 Electrical performance
Resistance: 50mOhm Max.
Current rating: 2.0A
4 Packaging specification conforms to EIA 481
5 RoHS compliant.

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

	NEW	2013/04/07
Rev.	Revision record.	Date.

DIST ---
DIST ---

Top-Link Electronics Ltd.

TOLERANCES UNLESS OTHER SPECIFIED
0. = ± –
0.0 = ± 0.15
0.00 = ± 0.10
0.000= ± –
Angle: ±1°
SURF TEXTURE:
REMOVE BURRS.
BREAK SHARP EDGES
R0.05 MAX.DO NOT
SCALE PRINT.

Type: Customer drawing	Unit: mm		Weight
DWN: Cai wanlu	APVD:	top-Link Electronics	Top-Link Electronics Ltd.
CHK:	REL:		
Name: Pogo pin connector			
Scale: 1:1	Size: A4	DWG No.: C-100967	Page: 1/1	Rev.: 1

100967-6
PART NUMBER