


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWN No.:

C-110735

DIST
DIST
DIST

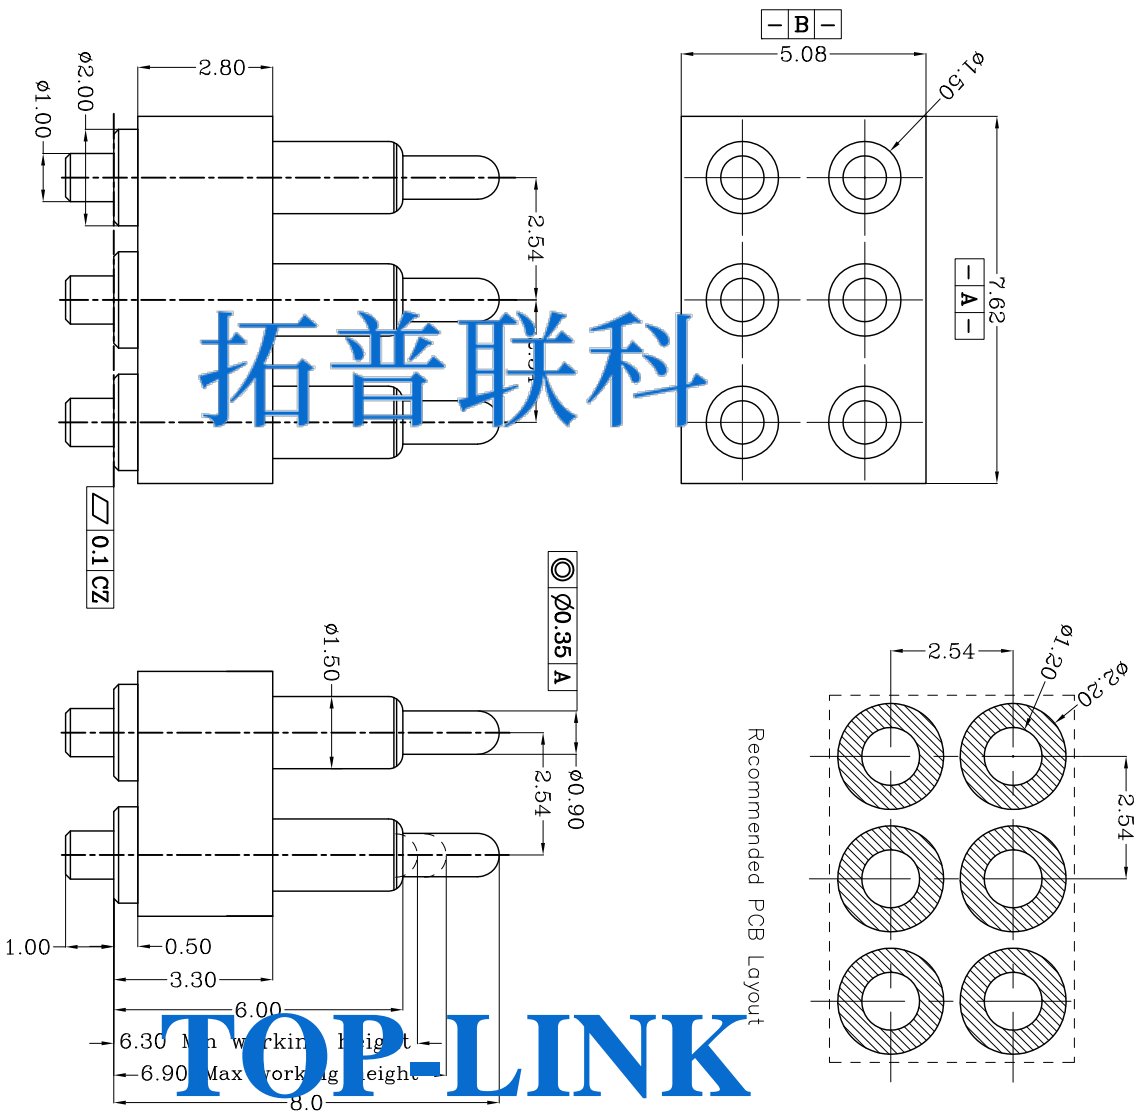

拓普联科

TOP-LINK

Recommended PCB Layout

Item	Part name	Qty/Ed	Material	Finish
1	HSG	1	High temp. Plastic UL94 V-0 Color Black	
2	Body	6	Leaded Brass	Gold plating over Nickel plating
3	Plunger	6	Leaded Brass	Gold plating over Nickel plating
4	Spring	6	Stainless steel wire	
5				

Max. working height	6.90mm	85gf Min<3.1>
Min. working height	6.30mm	160gf Max
Durability	10000cycle	

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <3.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - <3.2>Warning: Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max. Current rating: 2.0A
 - 4 RoHS compliant.

Rev.	Revision record.	Date.
	Renewal	2011/09/14
	NEW	2011/09/08

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin Zuozhong	APVD:		
0.0	± 0.15	CHK:	REL:			
0.00	± 0.10	Name				Customer drawing
0.000	± 0.05	Scale				1:1
SURF. TEXTURE:		Name		Size	A4	DWG No.
REMOVE BURRS.		Customer drawing				C-110735
BREAK SHARP EDGES		Name		DWG No.		C-110735
RO.05 MAX. DO NOT SCALE PRINT.		Name		Page	1/1	Rev.
		Name				2

110735-6
PART NUMBER

4

3

2

1