
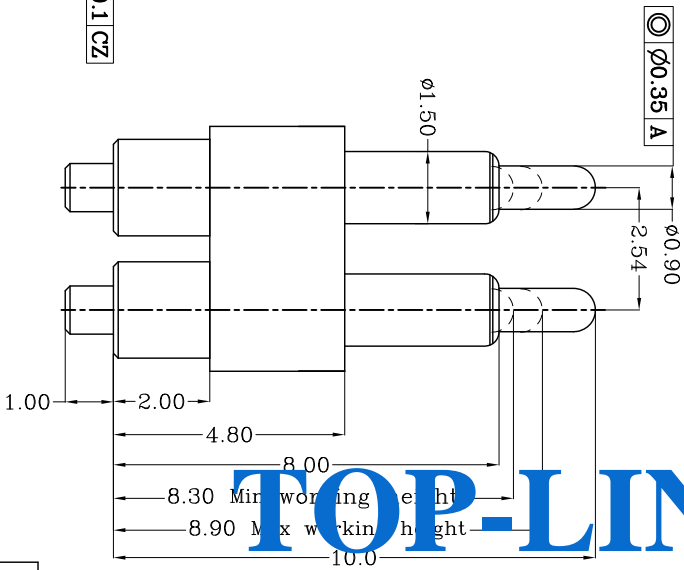


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWN No.:

C-110702

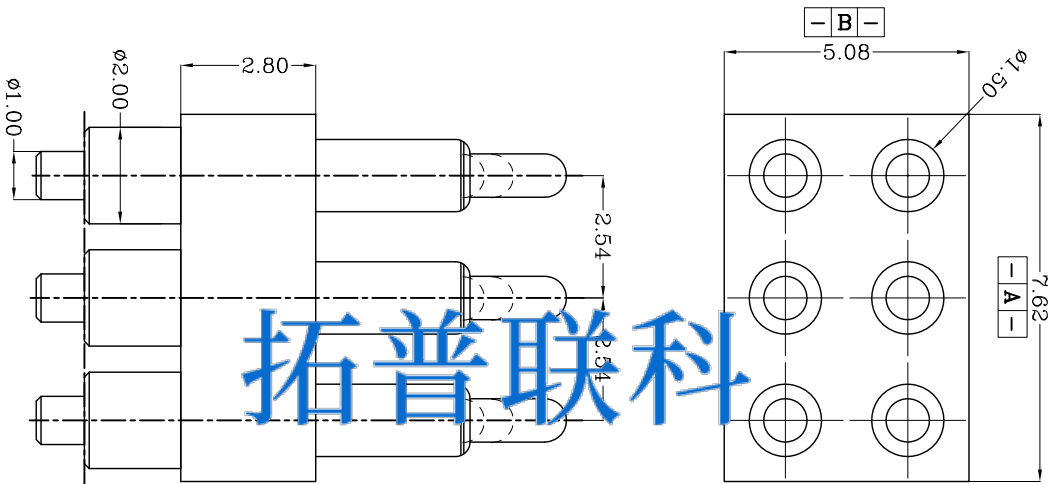

拓普联科

TOP-LINK

Item	Part name	Qty/Ed	Material	Finish
1	HSG	1	High temp. Plastic UL94 V-0 Color Black	
2	Body	6	Leaded Brass	Gold plating over Nickel plating
3	Plunger	6	Leaded Brass	Gold plating over Nickel plating
4	Spring	6	Stainless steel wire	
5				

Table 1 Mechanical performance		
Max. working height	8.90mm	80gf Min<3.1>
Min. working height	8.30mm	120gf Min
Durability	10000cycle	

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - 3.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - 3.2>Warning: Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
 - 4 Resistance: 30mOhm Max.Current rating: 2.0A
 - 4 Packaging Spec.Comformance to EIA 481
 - 5 RoHS compliant.

110702-6
PART NUMBER

Rev.	NEW	Date.	2011/05/30
Revision record.			

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight	
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin Zuozhong	APVD:			
0.0	±0.15	CHK:	REL:				
0.00	±0.10	Name		Customer drawing	PGC-1.5-10.0-2R-6P-2.54PH		
0.000	±0.05	Scale	1:1	Size	A4	DWG No.	C-110702
Angle: ±1°		Page	1/1	Rev.	1		
SURF. TEXTURE:							
REMOVE BURRS:							
BREAK SHARP EDGES							
RO.05 MAX. DO NOT SCALE PRINT.							

4
3
2
1