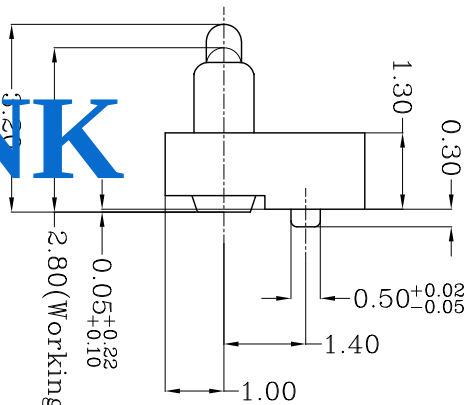
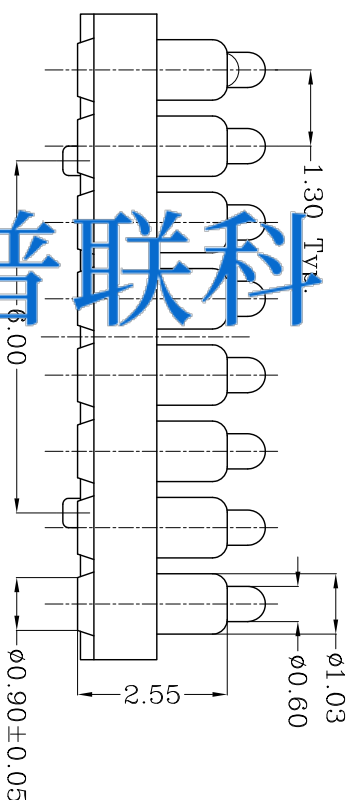


USED ON

拓普联科

TOP-LINK

- Notes:
- 1 Material(材质):
Housing: High temp. Plastic, UL94 V-0 Color Black.
Contact: Brass
Spring : Stainless steel wire
- 2 Plating:
1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镀底1.4um Min)
2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镀底1.4um Min)
- 3 Mechanical:
Force: 70±20gf per pin at 0.4mm stroke
Total stroke(总行程): 0.60mm
Durability(寿命): 10,000 cycle min.
- 4 Electrical(电性能)
Contact resistance(接触阻抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

100668-8

PART NUMBER

Recommended PCB Layout

LDC				ANGLE: 1°					
-	NEW		2010/12/08	SURF TEXTURE: ∇	32/				
DIST	REVISION RECORD	APVD	DATE	REMOVE BURRS, BREAK SHARP EDGES R005 MAX DO NOT SCALE PRINT	NAME	POGPD PIN CONNECTOR 8 POSITIONS PGC-1.5-3.2-R-8P-1.30PH			
-				SCALE 1:1	A4	DWG NO.	C-100668	SHEET 1 OF 1	REV 1

top-link Top-Link
Electronics Electronics Ltd.