


	DWN No.: C-110929
---	----------------------

Technical drawing of a 10-hole punch strip. The strip is 20.32 ± 0.15 inches long and 2.54 inches wide. It contains 10 circular holes, each with a diameter of 2.54 inches. The holes are spaced at 2.54 inches typical (Typ.) from the left edge.

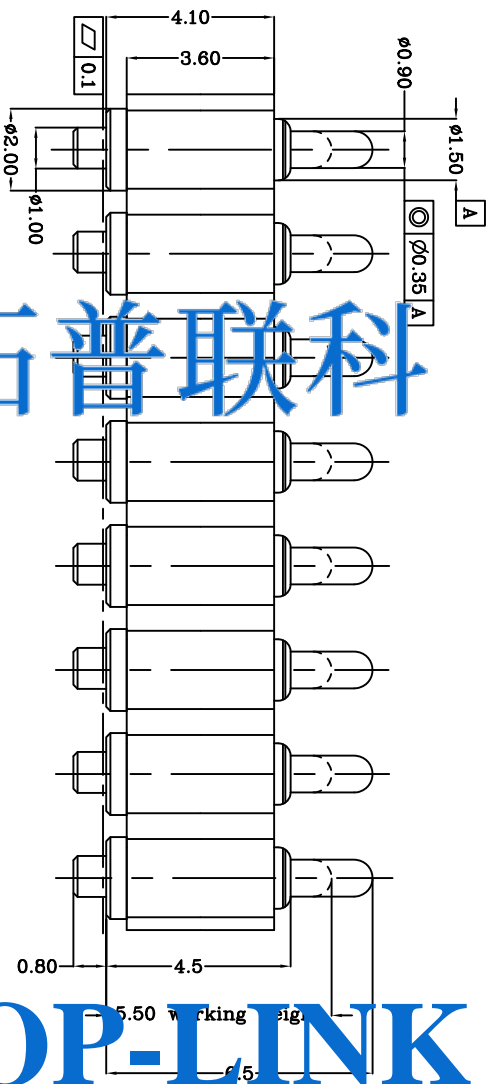

TOP-LINK

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp. Plastic UL94 V-0 Color Black	_____
2	Body	8	Leaded Brass	Gold plating over Nickel plating
3	Plunger	8	Leaded Brass	Gold plating over Nickel plating
4	Spring	8	Stainless steel wire	_____
5				

Table 1 Mechanical performance

Table 1 Mechanical performance		
working height	5.50mm	135±25gf
Durability	10000cycle	

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 <2.1>The force is the average of forces obtained when
plunger goes downwards and upwards.
- 3 Electrical performance
Resistance:50mOhm Max.
Current rating: 2.0A
- 4 RoHS compliant.

110929-8	PART NUMBER
----------	-------------

Top-Link Electronics Ltd	Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHERWISE SPECIFIED	DWG:	Cai wanlu	APVD:		
0.0 = ± 0.15	CHK:		REL:		<i>top-link</i> <i>Electronics</i> Top-Link Electronics Ltd
0.00 = ± 0.10					
0.000 = ± 0.005					
Angle: ±1°	Name	Customer drawing			
SURF TEXTURE: REMOVE BURRS.	Scale	Size	DWG No.	Page	Rev.
BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT.	1:1	A4	C-110929	1/1	1

1