

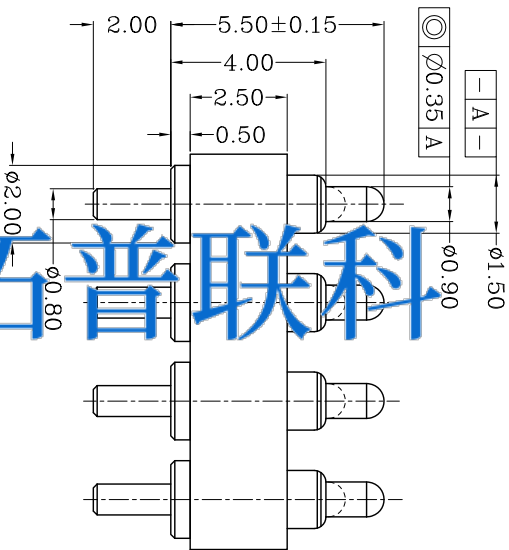



	DWN No.: C-110807
---	----------------------

proposal

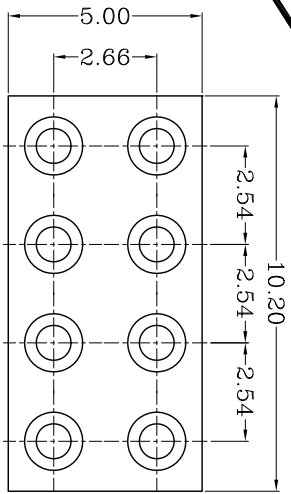

450 Working height

TOP-LINK

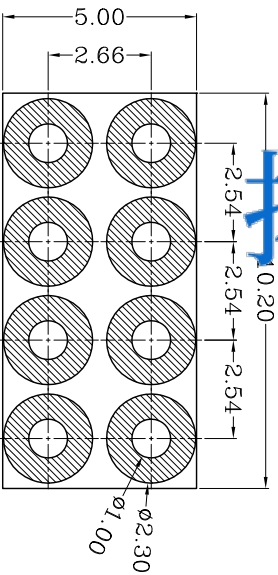

Recommended PCB Layout

Item	Part name	Q'ty/ Ea	Material	Finish
1	HSG	1	High temp,Plastic UL94 V-0 Color Black	_____
2	Body	8	Leaded Brass	Gold plating over Nickel plating
3	Plinger	8	Leaded Brass	Gold plating over Nickel plating
4	Spring	8	Stainless steel wire	_____
5				

Table 1 Mechanical performance

Table 1 Mechanical performance		
Working height	4.50mm	75±25gf <2.1>
Durability	10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 <2.1>The force is the average of forces obtained when
plunger goes downwards and upwards.
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- 4 RoHS compliant.

Top-Link Electronics Ltd	Type	Unit	mm	Weight
TOLERANCES UNLESS OTHERWISE SPECIFIED	Customer drawing	APVD:		
0.0 = $\pm$ 0.15	Cai wonlu	REL:		<i>Top-Link Electronics</i> Top-Link Electronics Ltd
0.00 = $\pm$ 0.10	CHK:			
0.000 = $\pm$ 0.001	Name			
Angle: $\pm$ 1	Customer drawing			
SURF TEXTURE: PGC-1.5-5.5-2R-8P-2.54PH/2.66PH	Size	DWG No.		
BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.	Scale 1:1	A4	C-110807	Page 1/1 Rev. 1.1