

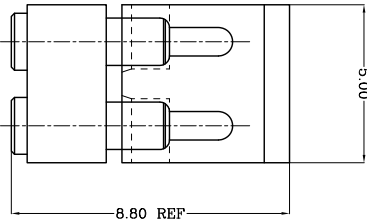

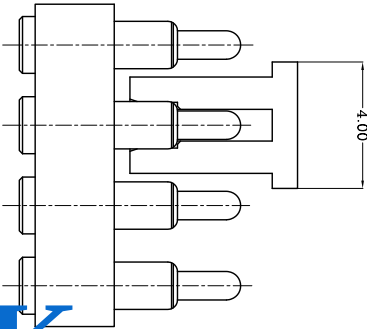
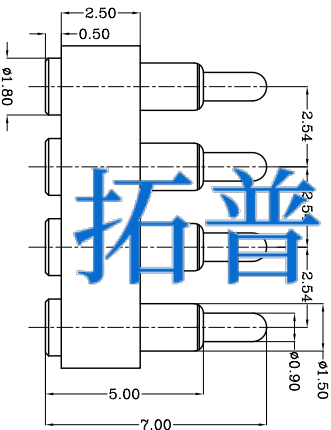


DWG NO.
C-100598

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

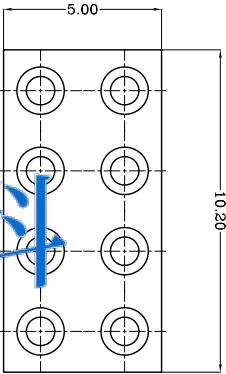

Notes:
Material(材质):
Housing: PA 46, UL94 V-0 Color Black.
Contact: Brass
Spring : Stainless steel wire

Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating Plunger: 镀金0.4um Min 镍底1.4um Min)

Mechanical(机械性能):
Force:150±30gf per pin at 1.3mm stroke (力:下压1.3mm的力:150±30gf)
Total stroke(总行程): 1.80mm
Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)
Contact resistance(接触抵抗): 30mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

LDC
-
DIST
-

增加CAP		2010/04/12
NEW		2010/01/06
L TR	REVISION RECORD	APVD DATE

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ± 0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	△	HT TR	—
DWN	Qin	APVD	
CHK	REL		
NAME	POGDI PIN CONNECTOR 8 POSITIONS		
SCALE	A4	DWG	ND.
1:1	A4	ND.	C-100598
			SHEET 1 OF 1
			REV 2

100598-8
PART NUMBER

USED ON
-